

The standalone detector incorporates a vibrant display, internal relays and RS485 communication which enables it to function as control panel and detector in one. The software provides control over all aspects of the detector.

Applications include: Waste Water Treatment Facilities, Manufacturing, Pharma, Bio-Pharma, Food and Beverage industries, Boilers, Laboratories, Car parks, Agriculture and Landfill sites.



System Features

- Remotely mount gas sensor
- Incorporates Infra-red, electro-chemical, catalytic and PID sensor technologies
- Visual indication of gas levels
- 1.7" Full Colour display
- Network up to 250 gas sensors
- U-processor based functionality
- RS-485 Modbus RTU
- 4-20mA output
- 2 x Volt free contacts 1A@30V
- Alarm levels freely programmable
- Internal fault monitoring
- Stainless steel sensor

User Friendly

- Non-intrusive one person calibration
- Easy to use step by step menu
- Minimal training required
- Programmable alarm delay
- Password protected
- Supplied pre-configured

Cost Benefits

- Standalone gas detector requiring no control panel
- RS-485 Network reduce cabling costs
- Simple installation
- Plug-in replacement sensors
- Detector stability allows for increased maintenance intervals

STEL: Short Term Exposure Limit 15 minutes. LTEL: Long Term Exposure Limit 8 hours.
IR: Infra-Red EC: Electrochemical CAT: Catalytic

Gas	LTEL	STEL	%Vol LEL	Relative Density	Sensor
Air	-	-	-	1.000	
Ammonia	25 ppm	35 ppm	15%	0.597	EC
Arsine	-	0.05 ppm	4.50%	2.690	EC
Butane	750 ppm	600 ppm	1.86%	2.006	IR
Carbon Dioxide	5000 ppm	15000ppm	-	1.519	IR
Carbon Monoxide	30 ppm	200 ppm	12%	0.967	EC
Chlorine	-	0.5 ppm	-	2.486	EC
DMF	0.1 ppm	0.3 ppm	3%	2.300	EC
Ethane	20 ppm	40 ppm	3%	1.038	IR/CAT
Ethanol	1000 ppm	-	3.30%	1.600	IR/CAT
Ethylene	-	-	2.75%	0.968	IR/CAT
Ethylene Oxide	5 ppm	-	3%	1.500	IR/CAT
Fluorine	1 ppm	1 ppm	-	1.310	EC
Hexane	20 ppm	-	1.25%	2.973	IR/CAT
Hydrogen	-	-	4%	0.070	CAT/EC
Hydrogen Chloride	1 ppm	5 ppm	-	1.268	EC
Hydrogen Cyanide	-	10 ppm	5.60%	0.940	EC
Hydrogen Fluoride	1.8 ppm	3 ppm	-	0.700	EC
Hydrogen Sulphide	5 ppm	10 ppm	4%	1.176	EC
LPG	750 ppm	-	2.10%	1.8-2.1	IR/CAT
Methane (natural gas)	-	-	5%	0.5537 (0.6-0.7)	IR/CAT
Nitric Oxide	25 ppm	-	-	1.037	IR/EC
NMP	3 ppm	5 ppm	5%	1.590	EC
Oxygen	-	-	-	1.104	EC
Ozone	-	0.2 ppm	-	1.660	EC
Pentane	600 ppm	-	1.40%	2.487	IR/CAT
Phosgene	0.02 ppm	0.06 ppm	-	1.390	EC
Phosphine	0.1 ppm	0.2 ppm	1.80%	1.170	EC/CAT
Propane	1000 ppm	-	2.10%	1.522	IR/CAT
Propylene	-	-	2%	1.452	IR/CAT
Sulphur Dioxide	2 ppm	5 ppm	-	2.264	EC
Tetrahydrothiophene	8 Hours	-	%Vol @ 20oC	Gas / Vapour	EC

Environmental Specifications

Operating temperature	-30 °C to 50 °C
Pressure range	80 to 120 kPa
Humidity range	15 to 90 % rh

Electrical Specifications


Supply voltage	24Vdc
Power Consumption	Max 2W
Fuse	50mA Auto-Reset

Sensor Specifications


Sensor types	NDIR, Thermo-catalytic, Electro-chemical, PID
Transient protection	PCB mounted Metal Oxide varistor
Terminations	PCB terminal blocks up to 2.5mm ² cables
Alarm inhibit	Password protected alarm inhibit / muting
Alarm level	Freely programmable
Alar Hysteresis	Reset level freely programmable
Alarm types	Digital setting (fully adjustable between 10% and 90% of full scale)
Alarm types	Energised / de-energised Enrichment / deficiency
Alarm Delay	Programmable delay on alarm activation.
Resolution	0.01, 0.1 & 1
Accuracy	Sensor dependent
Full scale range	Freely programmable
Memory	64KB EEPROM
EN Regulation Compliance	EN45544-1-4, EN50194, EN501041, EN61779-1-5

Electromagnetic conformance (EMC) complies with EN50081 and EN50082

Wiring



Dimensions (mm)

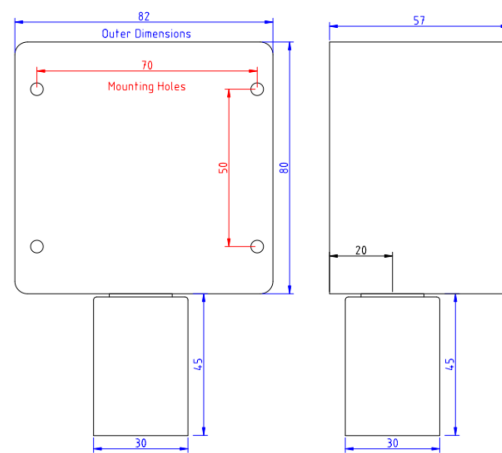

For more information:

T. +353 21 2429 448
E. sales@helioqd.com

www.HelioGD.com
Unit 3, Eastgate Way, Little Island, Cork, Ireland.

[linkedin.com/company/helio-gas-detection](https://www.linkedin.com/company/helio-gas-detection)

